

BIL-JAX[®]

PRO-JAX[®] UTILITY SCAFFOLD



Los Angeles Office/Warehouse
4421 Fountain Avenue
Los Angeles, CA 90029
(800) 794-1112
(323) 467-1190 Fax: (323) 665-0952

ISO 9001-2000 Certified

CHECK THE ADVANTAGES:

- 29" wide steel frames in 6', 8' and 10' brace lengths.
- Easily set up by one person.
- All steel square-tubed construction, yet light in weight.
- Packages come with our quality 250 lb. capacity 5" caster with both wheel and swivel locks. A heavy duty 8" caster is available.
- Patented knurled rungs for additional gripping.
- Unit easily rolls through doorways.
- Steel frame around plywood deck and 2 steel supports underneath.
- Heavy duty spring activated locking mechanism with no loose parts.
- Highest load capacity in its class at 1000 lbs.



0127-006-0 shown in use over lower obstacles allowed by the span type platform arm braces.

New, patent pending Saf-T-Lok®



Unique design allows guard railing to stay at platform level at all times. Platform level adjusts in 2" increments.



Unique Saf-T-Lok® provides added safety and is more efficient for use.



Pro-Jax units (with casters removed) can be used on stairs.

TYPICAL APPLICATIONS:

Electrical
Painting
Acoustical
Finishing
Window Cleaning
HVAC Installation


Sign Installation and Maintenance
Overhead Door Installation
Lighting and Wiring Maintenance
General Building Maintenance
Window Treatment Installation



0127-006-1 shown in a maintenance application.

UNIT HEIGHTS:

NOTE: Bil-Jax recommends and some states limit the free-standing tower height to be 3 times the minimum base dimension. When platform height exceeds 4', guard railing is recommended but not required. Current OSHA codes allow 4 times the minimum base dimension. Consult your state and local codes for compliance information.

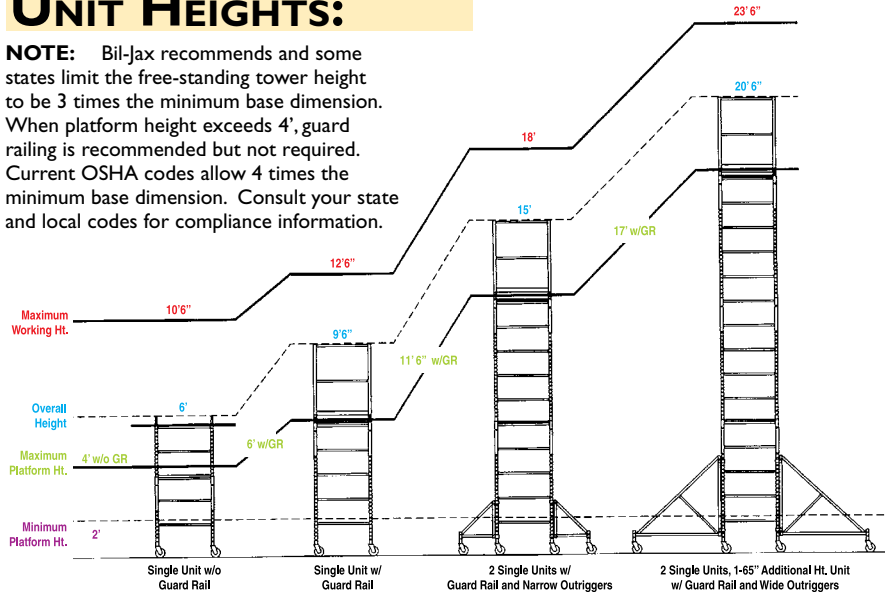

Units can be stacked for additional working height.

Due to continuous product improvements, we reserve the right to make specification and/or equipment modifications without prior notification or obligation. All photographs and drawings in this brochure are for illustrative purposes only. Refer to applicable ANSI and OSHA Codes and Regulations for the proper use of this equipment and do not use in areas where user and/or equipment can come in contact with live power. Failure to follow the appropriate safety instructions and procedures, or to otherwise act irresponsibly, may result in serious injury or death.

PRO-JAX® UTILITY SCAFFOLD PACKAGES:

PRO-JAX UTILITY SCAFFOLD STEEL PACKAGES (Includes frames, braces, platform & casters; outriggers and guard rails included where applicable.)							
Part No.	Length	Platform Ht. Range	Max.Wk.Ht.	OverallHt.	GdRail	Outrig.	Wt.
0127-006-0	6'	2'-4'	10'6"	6'	NO	NO	147
0127-006-1	6'	2'-6'	12'6"	9'6"	YES	NO	240
0127-006-2	6'	2'-11.5'	18'	15'	YES	YES	430
0127-006-3	6'	2'-17'	23'6"	20'6"	YES	YES	538
0127-008-0	8'	2'-4'	10'6"	6'	NO	NO	173
0127-008-1	8'	2'-6'	12'6"	9'6"	YES	NO	279
0127-008-2	8'	2'-11.5'	18'	15'	YES	YES	490
0127-008-3	8'	2'-17'	23'6"	20'6"	YES	YES	609
0127-010-0	10'	2'-4'	10'6"	6'	NO	NO	200
0127-010-1	10'	2'-6'	12'6"	9'6"	YES	NO	316
0127-010-2	10'	2'-11.5'	18'	15'	YES	YES	525
0127-010-3	10'	2'-17'	23'6"	20'6"	YES	YES	645

NOTE: Guard railing is required by OSHA on all platforms 10' or higher.




0127-006-0 Single Unit

0127-006-1 Single Unit w/Guard Rail

PRO-JAX UTILITY SCAFFOLD PACKAGE COMPONENTS							
PKG. PART NO.							
8' and 10' Long Packages Use Same Components Except For Length.		0127-006-0	0127-006-1	0127-006-2	0127-006-3	0127-007-3	0127-007-5
COMPONENTS							
0127-102	39" Frame					2	
0127-101	65" Frame	2	2	4	6		2
0127-163-06	6' Arm Brace	2	2	4	6	2	2
0127-108-06	6' Deck	1	1	2	2		
0026-835	5" Caster w/2 SP	4	4	8	8		
0127-106-06	6' Guard Rail		2	2	2		
0127-105-18	18" W Outrigger			4			
0127-105-24	24" W Outrigger				4		
0068-061	2" Snap Pin			4	8	4	4
0068-012	2" Hinge Pin		4	4	4		



0127-006-2 2 Single Units w/ Guard Rail & 18" Wide Outriggers

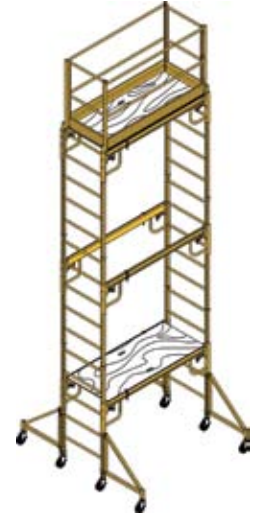

0127-006-3 2 Single Units, 1-65" Additional Height Unit w/Guard Rail & 24" Wide Outriggers

GUARD RAIL & OUTRIGGER PACKAGES		
Part No.	Description	Set Wt.
0127-149-06	6' Complete Guard Rail Pkg. (2 pcs.)	81.5
0127-149-08	8' Complete Guard Rail Pkg. (2 pcs.)	98
0127-149-10	10' Complete Guard Rail Pkg. (2 pcs.)	115
0127-150-18	18" Wide Outrigger Package (4 pcs.)	39
0127-151-24	24" Wide Outrigger Package (4 pcs.)	50

ADDITIONAL HEIGHT PACKAGES			
Part No.	Length	Height	Overall Wt.
0127-007-3	6'	39"	75
0127-007-5	6'	65"	95
0127-009-3	8'	39"	83
0127-009-5	8'	65"	103
0127-011-3	10'	39"	97
0127-011-5	10'	65"	123

When using these packages, remember the need of outriggers and guard railing.
8' and 10' length units available.
Hinged platforms for inside access are available.
Packages are available with expanded steel walkboards.

COMPONENTS: See price list for complete component listing or consult factory.



0127-163-06 Platform Arm Brace, featuring the new Saf-T-Lok®



0127-108-06 Plywood Deck w/ Steel Frame



0127-113 Expanded Steel Deck



0127-007-3 39" Additional Height Unit



0127-007-5 65" Additional Height Unit



0127-102 39"H Frame



0127-101 65"H Frame



0026-952 Caster



0026-835 Caster



0127-150-18 18" W Outrigger Pkg.



0127-150-24 24" W Outrigger Pkg.



0127-149-06 6' Guard Rail Pkg.

DRYWALL CARTS / DRYWALL LIFTS / HANDY ROLLS:

DRYWALL CARTS

The Drywall Cart is designed to haul full capacity loads with easy maneuverability and complete stability. Support bracing is removable for easy storage and handling.



Drywall Cart
DC 3000 LD

Drywall Cart
DC 3000 MD

Drywall Cart
DC 3000 EX

DRYWALL LIFTS

The Drywall Lift holds 4' x 12' sheets of drywall, and knock down for easy storage and handling. The winch designs use a steering wheel for easy adjustment.



Panel-Jax Drywall Lift
Model DL 100, 5'-10'

Panel-Jax Drywall Lift
Model DL 125, 5'-12'

Panel-Jax Drywall Lift
Model DL 150, 5'-15'

DRYWALL CARTS			
Part No.	Description	Cap.#	Wt.#
0063-0573-01YE	Model DC 3000 LD, Drywall Cart (23" W x 49"L x 45"H) w/ 2 plastic swivel and 2 plastic rigid casters*	3000	83
0063-0574-11YE	Model DC 3000 MD, Drywall Cart (23"W x 49"L x 45"H) w/ 2 steel swivel and 2 steel rigid casters*	3000	104
0063-0575-11YE	Model DC 3000 EX, Drywall Cart (28"W x 50"L x 47"H) w/ 2 steel swivel and 2 steel rigid casters*	3000	137

*Other caster options available, contact factory for more information.

DRYWALL LIFTS			
Part No.	Description	Cap.#	Wt.#
0063-0547	Model DL 100, Panel-Jax Drywall Lift Steel, up to 10' Lift Adjustment	200	104
0063-0580	Model DL 125, Panel-Jax Drywall Lift Steel, up to 12' Lift Adjustment	200	125
0063-0595	Model DL 150, Panel-Jax Drywall Lift Steel, up to 15' Lift Adjustment	160	141

NOTE: Model DL 100 includes one replacement cable with the lift. Models DL 125 and DL 150 include two cables (due to the specific lift construction). Cables should be replaced annually or more often if fraying occurs.

HANDY ROLL SCAFFOLDING:

3 Convenient Sizes: 3', 4', and 5' High • All Units Rated With 400# Load Cap. • 2 Caster or 4 Caster Units Available



- Handy Roll Scaffolding features a sturdy, 1" O.D. tubular steel construction.
- It is a fabricated, easy to use unit that folds for convenient storage and handling.
- Four inch swivel casters with brakes provide complete portability.
- Steel planks are 10" wide.

Handy Roll, 0063-0435-44, 4-caster model shown, 2 caster/end options listed below



HANDY ROLL SCAFFOLDING - 4 CASTER UNITS			
Part No.	Description	Cap.	Wt.
0063-0435-34	3' Handy Roll Scaff. 4 Caster Unit w/ Steel Platforms, 24" W x 48" L x 39" H	400	72
0063-0435-44	4' Handy Roll Scaff. 4 Caster Unit w/ Steel Platforms, 24" W x 48" L x 51" H	400	87
0063-0435-54	5' Handy Roll Scaff. 4 Caster Unit w/ Steel Platforms, 27" W x 64" L x 63" H	400	106

HANDY ROLL SCAFFOLDING - 2 CASTER UNITS			
Part No.	Description	Cap.	Wt.
0063-0435-32	3' Handy Roll Scaff. 2 Caster Unit w/ Steel Platforms, 24" W x 48" L x 39" H	400	72
0063-0435-42	4' Handy Roll Scaff. 2 Caster Unit w/ Steel Platforms, 24" W x 48" L x 51" H	400	87
0063-0435-52	5' Handy Roll Scaff. 2 Caster Unit w/ Steel Platforms, 27" W x 64" L x 63" H	400	106



Los Angeles Office/Warehouse
4421 Fountain Avenue
Los Angeles, CA 90029
(800) 794-1112
(323) 467-1190 Fax: (323) 665-0952

Printed in the U.S.A.
© Bil-Jax, Inc. 2006
Part No. 0205-0002

Due to continuous product improvements, we reserve the right to make specification and/or equipment modifications without prior notification or obligation. All photographs and drawings in this brochure are for illustrative purposes only. Refer to applicable ANSI and OSHA Codes and Regulations for the proper use of this equipment and do not use in areas where user and/or equipment can come in contact with live power. Failure to follow the appropriate safety instructions and procedures, or to otherwise act irresponsibly, may result in serious injury or death.